

Specifications


| | |
|----------------------------|---|
| Output | 520W |
| Mainboard 20+4Pin | 1x |
| 4Pin/ 4+4Pin/ 8Pin 12V | -/•/- |
| PCI-Express 6+2Pin | 1x |
| PCI-Express 6Pin | - |
| IDE 4Pin | 4x |
| S-ATA | 4x |
| Floppy | 1x |
| Fan Monitoring | - |
| 115/230V Input | •/• |
| PFC | Active |
| ATX-Standard | ATX 2.31 |
| Fan Dimensions | 120mm |
| Fan Control | Auto. |
| Noise Level | 19-21dB |
| Cable Management | - |
| Protection Circuit | OVP, SCP, OPP, UVP, OS |
| PSU Dimensions (H/W/D) | 86/150/140mm |
| Package Dimensions (H/W/D) | 170/240/95mm |
| Weight (net) | 1.25Kg |
| Weight (gross) | 1.59Kg |
| Packing Units (VE/VPE/PAL) | 1/10/320 |
| Guarantee and Warranty | 24 Months Guarantee |
| Article Number | 88882117 |
| EAN-Code | 4260133126015 |
| Scope of delivery | screws power cable manual cable ties |
| 80+ Certificate | - |

- = existing
- = non existing

Certification:



Connectors

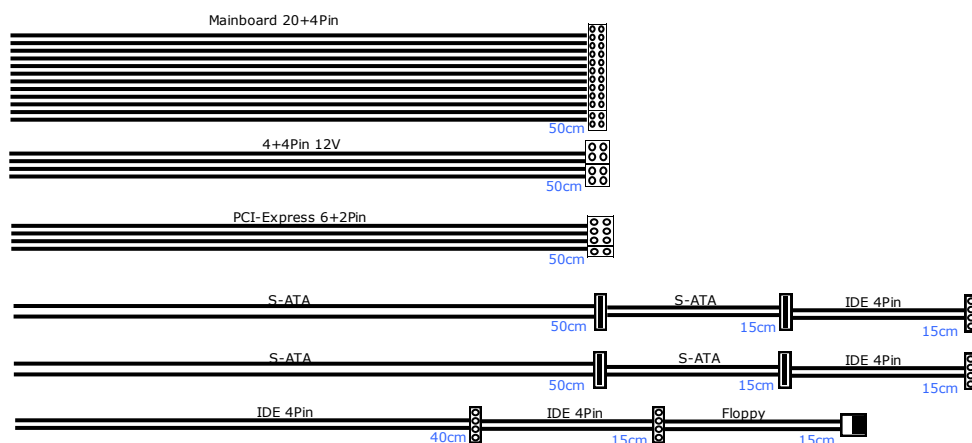

| | | | | | | | |
|-----------|---------------------|------------------|-----|------|------|------|------|
| AC Input | | 115-230V 47-63Hz | | | | | |
| DC Output | | 3.3V | 5V | 12V1 | 12V2 | -12V | 5Vsb |
| APS-520 | Max. Current | 18A | 15A | 22A | 22A | 0.3A | 3A |
| | Max. Combined Power | 120W | | 470W | | 3.6W | 15W |
| | | 520W | | | | | |