



150Mbps Wireless N Router

WF2412

Features

- Wireless N speed up to 150Mbps
- Multi-wireless modes to expand the wireless network: AP, WDS, AP+WDS, Client, Repeater
- Easy wireless security encryption with single WPS button
- Slim body design and internal antenna to save space
- Fast setup the router and configure Repeater & Wireless with the Setup CD.



Brief

The netis WF2412 is a combined wired and wireless device for SOHO network applications. With the ingenious and slim body design, it provides you a perfect choice for home and travel use. This router is compatible with 802.11b/g/n (WiFi 4) devices and provides the wireless transfer speed up to 150Mbps, offering a better performance on web surfing, emailing, and file sharing. Moreover, it supports multi-wireless modes including AP, WDS, AP+WDS, Repeater, Client, to expand your wireless network easily.

Specification



Wireless	
Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (WiFi 4)
Signal Rate	Up to 150Mbps
Frequency Range	2.4-2.4835GHz
Transmit Power	20dBm(MAX)
Data Transfer Rates	802.11n: 40MHz(150Mbps, 135Mbps, 120Mbps, 90Mbps, 60Mbps, 45Mbps, 30Mbps, 15Mbps) 20MHz (72Mbps, 65Mbps, 57Mbps, 43Mbps, 28Mbps, 21Mbps, 14Mbps, 7Mbps) (Auto-Sense) 802.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps,9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Modes	AP, WDS, AP+WDS, Repeater, Client, Multiple AP
Wireless Security	64/128-bit WEP, WPA-PSK/WPA2-PSK (TKIP/AES) SSID Broadcast Enable/Disable Wireless MAC Filtering

Hardware	
Standards	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interfaces	1 * 10/100M Auto MDI/MDIX RJ45 WAN port 4 * 10/100M Auto MDI/MDIX RJ45 LAN port
LED Indicators	PWR,WPS, WAN, 1X-4X
Buttons	Default, WPS
Antenna	1 * internal 4dBi antenna
Power Supply	DC 9V/500mA(Output)
Dimensions (L xW x H)	49 x 88 x 115 mm
Weight	112 g

Software	
WAN Type	DHCP(Dynamic IP), PPPoE, Static IP, WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/MAC/Domain filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade

Others	
Certification	FCC, CE, NCC, BSMI
Environment	Operating Temperature: 0°C~40°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package	1 *WF2412 1 *Setup CD 1 * Power Adapter 1 * Ethernet Cable

Topological Graph

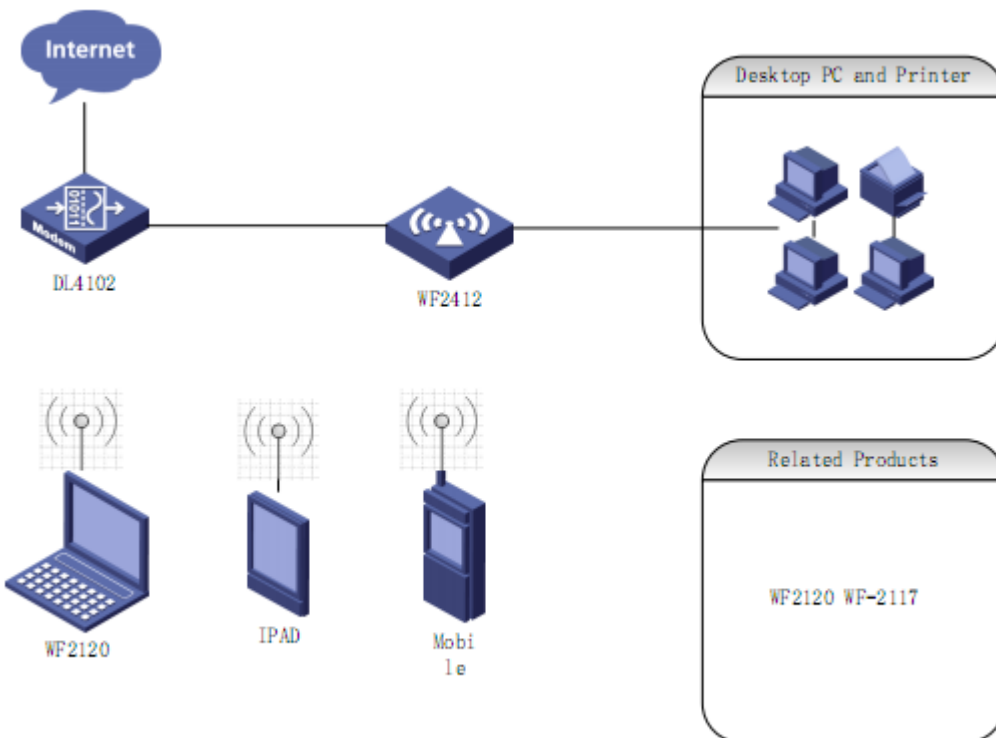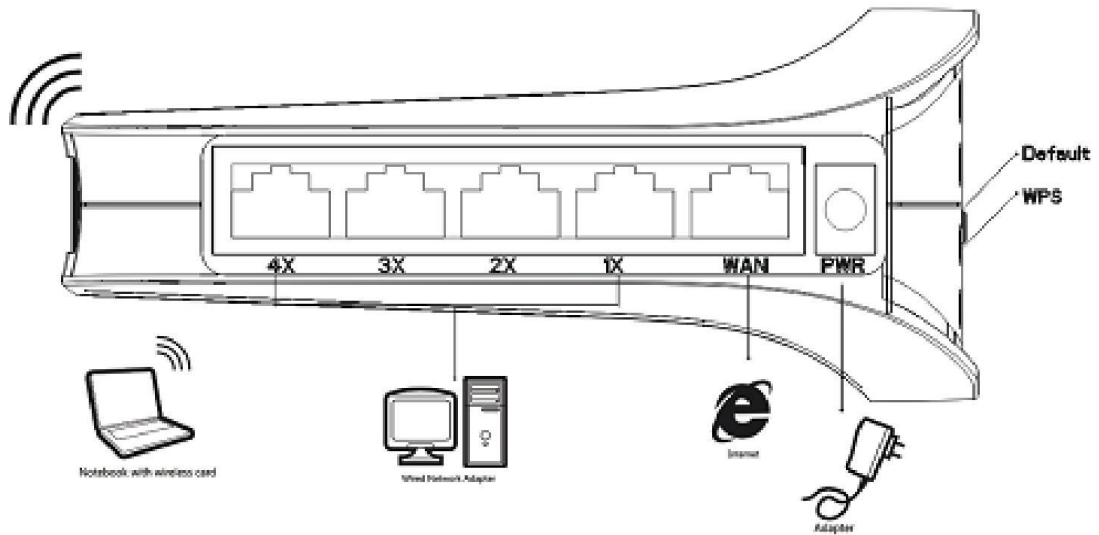

Specifications are subject to change without notice. Netis is a registered trademark of Netis Systems Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications maybe reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from Netis Systems Co., Ltd.