



AC750 Wireless Dual Band Router

WF2710

Features

- ♦ Works seamlessly with all 802.11a/b/g/n/ac (WiFi 5) devices
- ♦ Simultaneous 2.4GHz 300Mbps and 5GHz 450Mbps connections
- ♦ 3* 5dBi high gain antennas
- ♦ Various WAN connection types in AP Router mode- DHCP, Static IP, PPPoE, L2TP, PPTP, Dual Access (Russia PPPoE/PPTP/L2TP), WISP
- ♦ Multiple wireless modes- AP, AP+WDS, WDS, Client
- ♦ Multi-SSID providing up to 6 additional separate networks for guests and friends
- ♦ Easy wireless security setup at a push of the WPS button
- ♦ Intelligent bandwidth control to manage the bandwidth usage for each computer reasonably
- ♦ Internet Access Control- IP filtering, MAC Filtering, Domain Filtering based on time
- ♦ Quick setup, with built-in multilingual management page



Description

The netis router WF2710 equipped with the next generation 802.11AC (WiFi 5) technology, will offer you simultaneous dual band connection with 450Mbps wireless speeds over the crystal clear 5GHz band and 300Mbps over the 2.4GHz band, ideal for faster downloading, online gaming, Internet calling and HD video streaming.

Wireless	
Standards	IEEE 802.11b/g/n 2.4GHz IEEE 802.11a/n/ac 5GHz (WiFi 5)
Signal Rate	Up to 300Mbps 2.4GHz Up to 450Mbps 5GHz
Frequency Range	2.4-2.4835GHz; 5.180-5.825GHz
Transmit Power	20dBm(MAX)
Data Transfer Rates	802.11ac: 80MHz(450Mbps) 802.11n: 40MHz(300Mbps, 270Mbps, 240Mbps, 180Mbps, 120Mbps, 90Mbps, 60Mbps, 30Mbps) 20MHz (144Mbps, 130Mbps, 115Mbps, 86Mbps, 57Mbps, 43Mbps, 28Mbps, 14Mbps) (Auto-Sense) 802.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps,9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Modes	AP, AP+WDS, WDS, Client, Multi-SSID
Wireless Security	WEP/WPA-PSK/WPA2-PSK Encryption Wireless MAC Filtering


Specification

Hardware	
Standards	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interfaces	1 * 10/100M Auto MDI/MDIX RJ45 WAN port 4 * 10/100M Auto MDI/MDIX RJ45 LAN port
LED Indicators	PWR, WPS, SYS, 2.4G, 5G LAN1 ~4, WAN, WPS
Buttons	Default, WPS
Antenna	3 * external fixed 5dBi antenna
Power Supply	DC 12V/1A(Output)
Dimensions (L x W x H)	140 x 58 x 41 mm
Weight	151g

Software	
WAN Type	DHCP, Static IP, PPPoE, L2TP, PPTP, Dual Access, WISP
Others	Bandwidth Control, Access Control, Virtual Server, DMZ, VPN Pass-through, Dynamic DNS, Static Routing, WOL, Backup & Restore

Others	
Certification	FCC, CE, KC
Environment	Operating Temperature: 0°C~40°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package Contents	1* WF2710 1* 12V/1A Power Adapter 1* Ethernet Cable 1* Quick Installation Guide (Multilingual)

Diagram

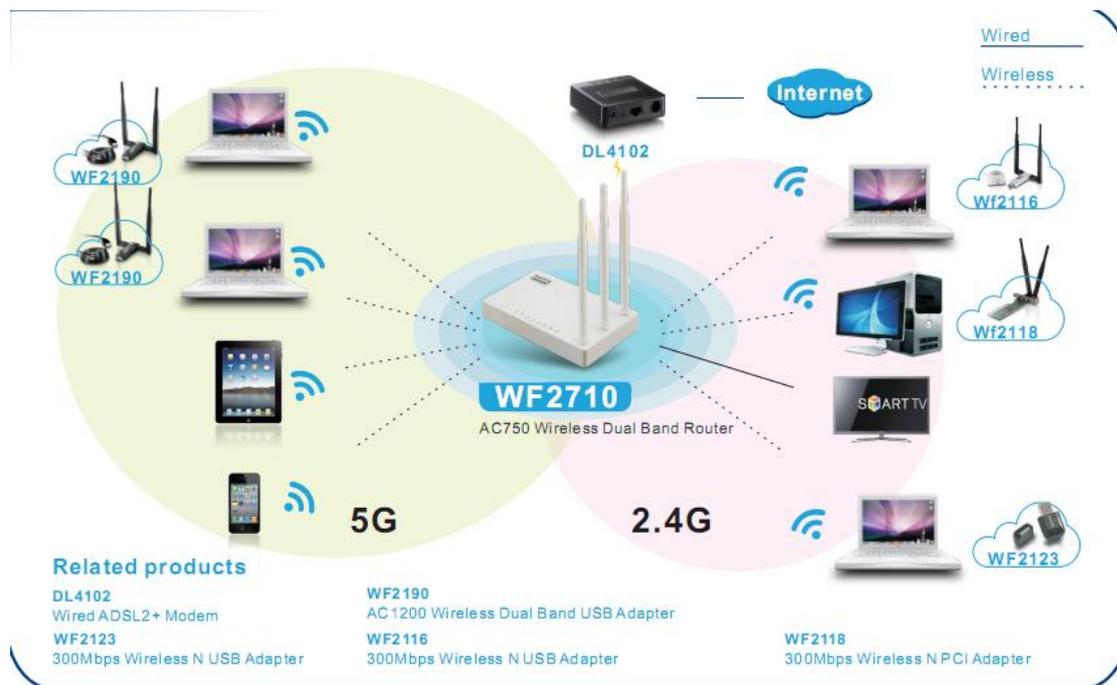

Specifications are subject to change without notice. Netis is a registered trademark of Netis Systems Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from Netis Systems Co., Ltd.