




Specifications

Output	450W
Mainboard 24Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/•/-
PCI-Express 6+2Pin	-
PCI-Express 6Pin	-
IDE 4Pin	2x
S-ATA	6x
Floppy	-
Fan Monitoring	-
115/230V Input	•/• (auto.)
PFC	Active
Fan Dimensions	4x 40mm
Fan Control	Auto.
Redundant	•
Protection Circuit	OVP, SCP, OPP, OCP, OTP
MTBF	Average 100000h
Operating Temperatur	0 to 50°C
Storage Temperatur	-40 to 70°C
PSU Dimensions (H/W/D)	84/150/190mm
Weight (net)	3.71kg
Weight (gross)	4.11kg
Packing Units (VE/VPE)	1/4
Guarantee and Warranty	36 Months Guarantee
Article Number	99997001
EAN-Code	4260133128637
Features	Bicoloured LED status display Acoustic alarm signal when a module power failing or a fan error arose Cable for reset and alarm LED TTL-Output for failure signals on compatible Backplanes or Mainboards
80+ Certificate	-

• = existing
- = non existing

Connectors

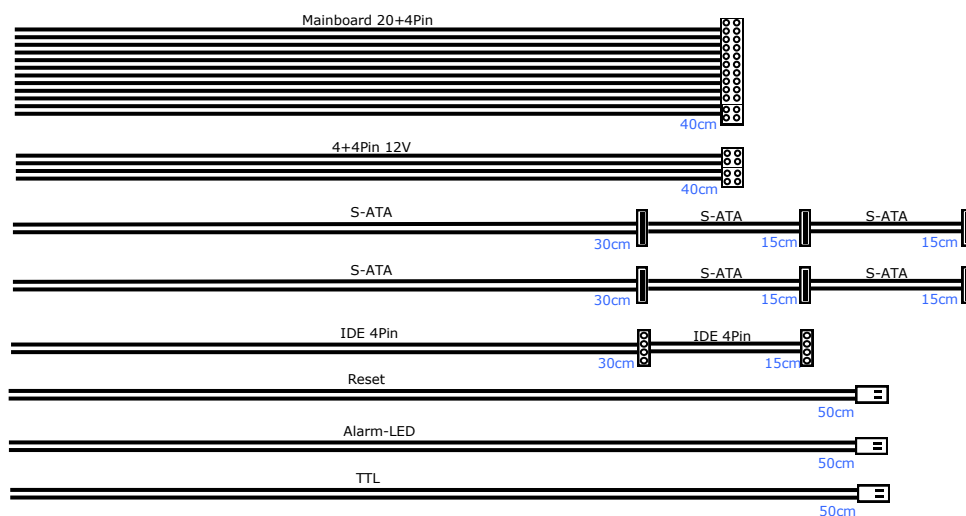

Efficiency (min.)

PFC from 10% Load <0,8, from 20% Load <0,9	Full Load (100%)	Typical Load (50%)	Light Load (20%)
115VAC	85%	88%	86%
230VAC	86%	92%	90%

AC Input		100-240V 8-4A 47-63Hz					
DC Output		3.3V	5V	12V1	12V2	-12V	5Vsb
ASPOWER R2A- MV0450	Max. Current	30A	30A	20A	20A	1A	3A
	Max. Combined Power	150W		400W		25W	
		450W					