

NEW PRODUCT SPEC SHEET

Model Number: G666R1

- For Intel® Xeon® Processor X5500 Series and X5600 Series, Socket LGA1356/1366
- Active cooler for 2U Servers & Up
- RoHS Compliant

Overall Specification:

- Dimension: 90.0mm x 90.0mm x 65.0mm
- Weight: 500g
- Material: Aluminum Fins with Heat Pipes directly contact CPU
- With 60x60x25mm Side-blow cooling fan
- Cooler Mounted in Captive design
- Shin-Etsu G751 Thermal Grease Pre-printed
- Support CPU power up to 130Watts Heat Dissipation

Fan Specification:

- Model# : DF126025BU - PWMG
- Rated Speed:
 - At Duty Cycle 20%: 1700 $\pm$ 10%RPM
 - At Duty Cycle 50%: 4000 $\pm$ 10%RPM
 - At Duty Cycle 100%: 8000 Min.
- Bearing: 2X Ball
- Rated Voltage: 12V
- Power Consumption :
 - At Duty Cycle 20%: 0.6W
 - At Duty Cycle 50%: 1.8W
 - At Duty Cycle 100%: 7.2W

- Rated Airflow:
 - At Duty Cycle 20%: 8.855 cfm
 - At Duty Cycle 50%: 21.97 cfm
 - At Duty Cycle 100%: 46.44 cfm
- Acoustical Noise:
 - At Duty Cycle 20%: 21.8 dBA
 - At Duty Cycle 50%: 34.5 dBA
 - At Duty Cycle 100%: 52.8dBA
- Air Pressure
 - At Duty Cycle 20%: 0.86 mm-H2O
 - At Duty Cycle 50%: 4.76 mm-H2O
 - At Duty Cycle 100%: 21.50 mm-H2O
- Lead Wire Pin Out:
 - Pin#1-Black(-)
 - Pin#2- Yellow(+)
 - Pin#3- Green(Tachometer/ Signal Output)
 - Pin#4- Blue (PWM)


Thermal Spec & Chart :

Testing Equipment: Intel® Socket1366 TTV

Thermal Design Power :130Watts



T_{LA}: 40 degreeC

Testing Interval: 90mins

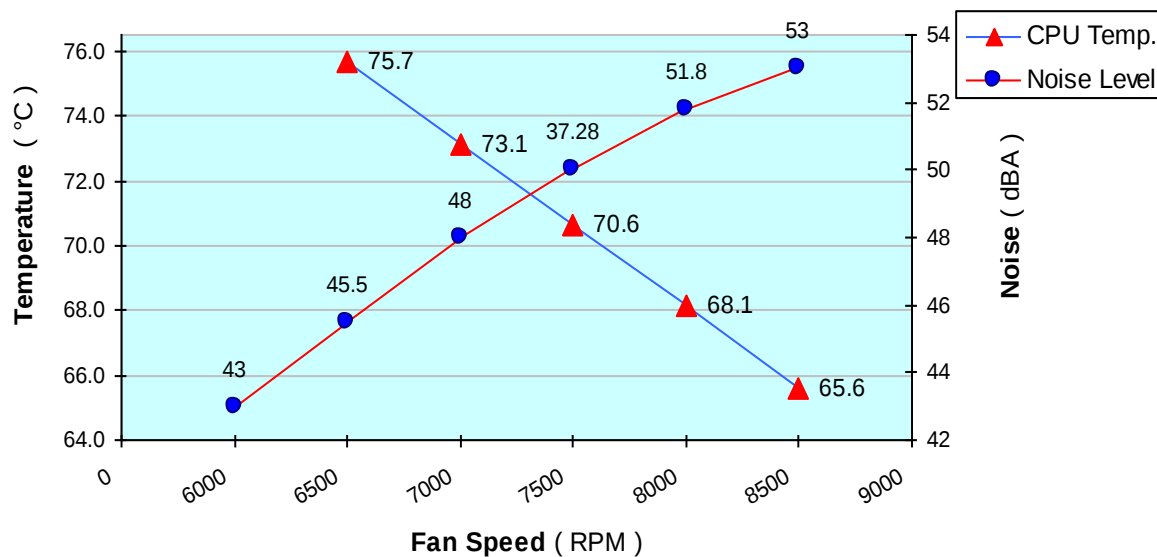

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.

WHOLE SET OF COOLER

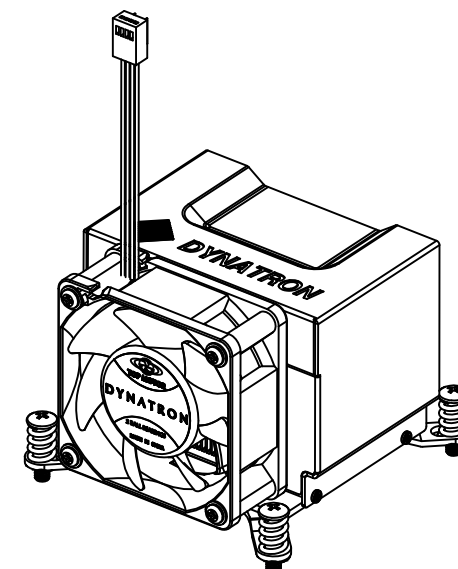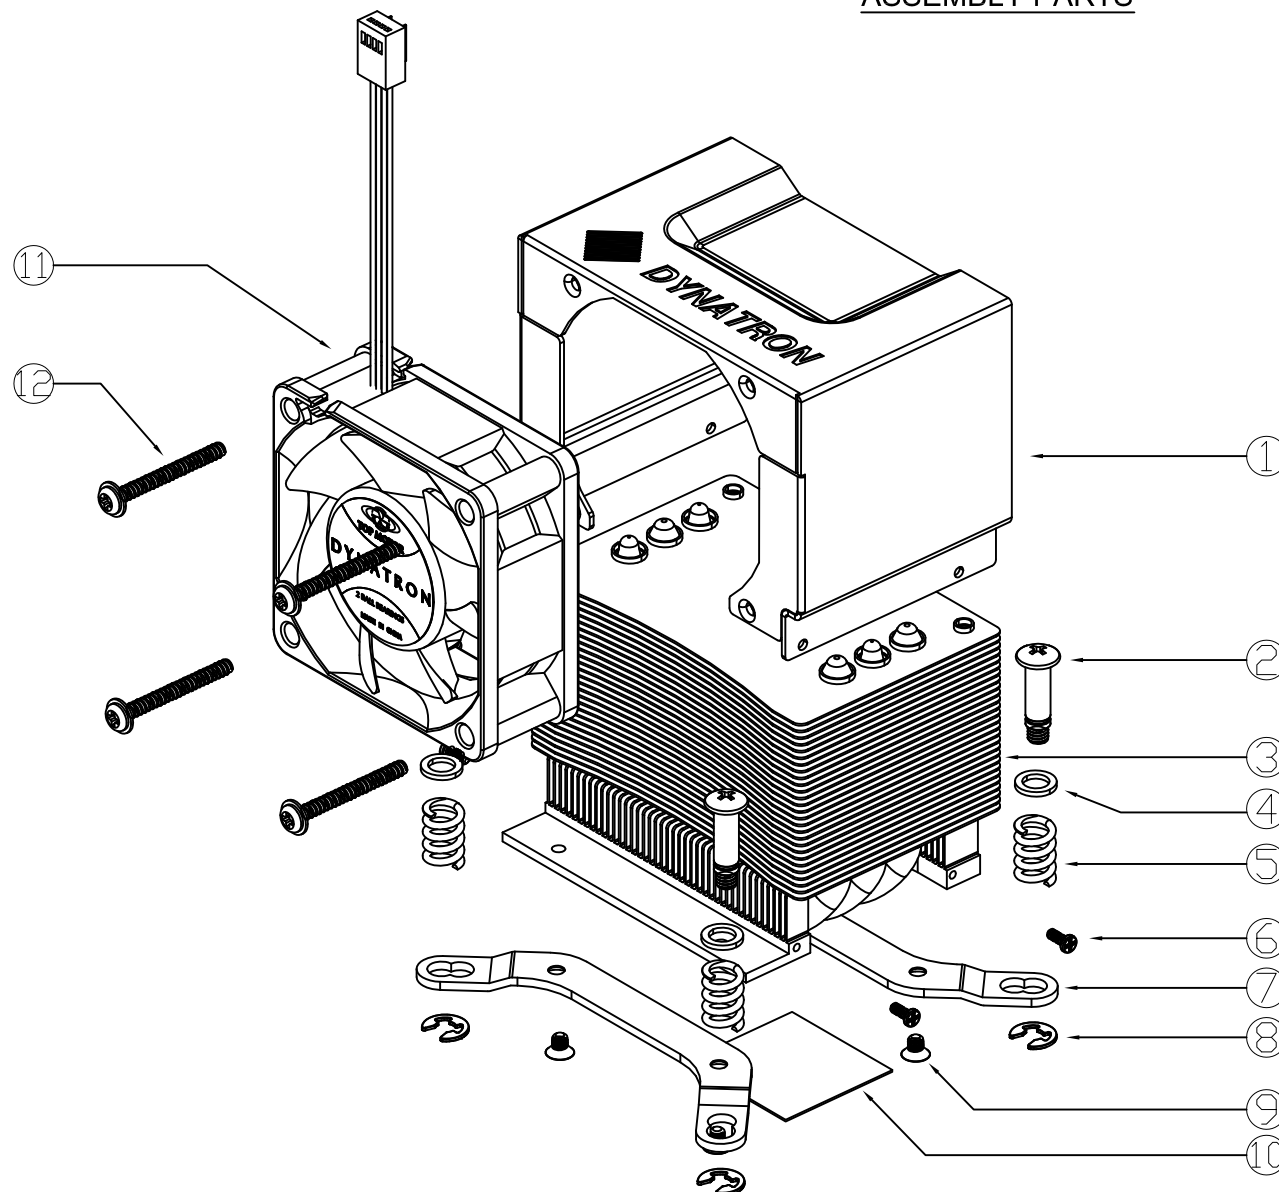

NOTES:

1. THE FIGURE IS FOR REFERENCE ONLY, AND NOT FOR SCALE
2. OVERALL DIMENSION: 90.7 x 85.0 x 64.5 mm
3. OVERALL WEIGHT: 500g

12	SCREW, FAN	STEEL	4
11	FAN, DF126025BU-PWMG, 8000RPM	PLASTIC	1
10	THERMAL GREASE, PRINTED	SHIN-ETSU G751	1
9	SCREW, RETENTION	STEEL	4
8	C-RING	STEEL	4
7	RETENTION	SK7	2
6	SCREW, FAN COVER	STEEL	4
5	SPRING, 10mmL	SUS304	4
4	WASHER	STEEL	4
3	HEATSINK	CU.BASE+AL.FIN+HP	1
2	SCREW, HEATSINK, M3x0.5	STEEL	4
1	COVER, FAN	ALUMINUM	1
ITEM#	DESCRIPTION	MATERIAL	QTY

	DATE	NAME	 DYNATRON CORPORATION
DRAWN	11/16/12	engr	
CHECKED	11/16/12	LANG	
ENG. APPR.			
MFG. APPR.			
S.A.			
COMMENTS:			DWG. No: DYN-EP-G666 R1 REV: 00

TITLE: 2U Active Cooler **G666**
 (MFG# : LC06250044)
 BOM & Exploded Assembly Drawing

